

MHD Simulations of Disruption Mitigation on Alcator C-Mod and DIII-D

By
V.A. Izzo

with D.G. Whyte,² R.S. Granetz,² P.B. Parks,³ E.M. Hollmann,¹
L.L. Lao,³ J.C. Wesley³

¹ University of California, San Diego

² MIT Plasma Science and Fusion Center

³ General Atomics

Presented at
Forty-Ninth APS Meeting of
the Division of Plasma Physics
Orlando, Florida

November 12–16, 2007

Acknowledgements: T. Strait, NIMROD team




Motivation

- Disruption mitigation is a serious problem for ITER, and is being investigated on present tokamaks. Runaway electron avalanching is a major concern given exponential scaling with plasma current.
- Massive gas injection (MGI) is one approach that has been studied on Alcator C-Mod and DIII-D
- MGI is a 3D process in which MHD plays an important role– physics of MGI needs to be better understood
- A model capable of extrapolating MGI results to ITER must be 3D and accurately account for both MHD and atomic physics– an extended version of NIMROD has been developed for this purpose
- Validation of the code against present experiments, along with improved understanding of results is the focus in the near term

Outline

- 1) The physics of MGI: experimental observations and present understanding
- 2) The code: Atomic physics package for impurity modeling has been added to NIMROD
 - Equations, neutral source model, adjustment of time scales
- 3) Qualitative comparison: MGI sequence of events is captured by simulations
- 4) Quantitative comparisons:
 - Thermal quench time agrees w/ C-Mod for neon jets
 - Helium jet simulations require background impurities
- 5) Conclusion, Future work

DIII-D Discharge 122516 Shows MGI Sequence of Events

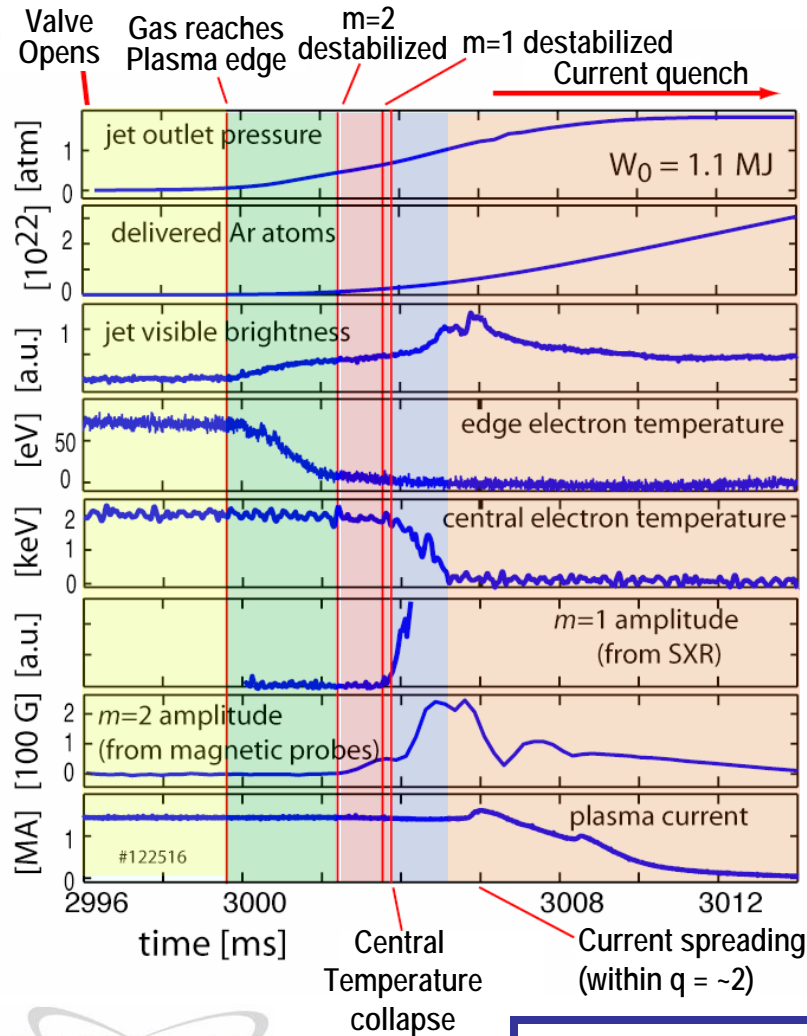

1) Valve opens and gas travels down tube

2) Gas reaches plasma, edge begins to cool, current profile contracts

3) m=2 and m=1 modes are destabilized, flux surfaces are destroyed

4) Core thermal quench due to enhanced thermal transport and/or impurity mixing

5) Current quench

Simulations of stages 2-4 are presented

Modeling of Impurity Species is Added to NIMROD

NIMROD is a 3D MHD code

Atomic physics package computes ionization, recombination, radiation for all charge states of impurity species— source terms added to MHD equations

Energy

$$n_e \frac{dT_e}{dt} = (\gamma - 1)[n_e T_e \vec{\nabla} \cdot \vec{V} + \vec{\nabla} \cdot \vec{q}_e - Q_{\text{loss}}]$$

Q_{loss} includes ionization, line radiation, bremsstrahlung, and recombination losses, as well as dilution cooling

Heat Flux Vector

$$\vec{q} = -n[\chi_{\parallel} \hat{b}\hat{b} + \chi_{\perp} (\mathbf{I} - \hat{b}\hat{b})] \cdot \nabla T$$

$$\chi_{\perp} \sim 1 \text{ m}^2/\text{s} ; \chi_{\parallel} \sim 10^{10} \text{ m}^2/\text{s}$$

Ohm's Law

$$\vec{E} + \vec{V} \times \vec{B} = \eta \vec{J}$$

η proportional to local Z_{eff} as well as $T_e^{-3/2}$

Momentum

$$\rho \frac{d\vec{V}}{dt} = -\vec{\nabla} p + \vec{J} \times \vec{B} + \vec{\nabla} \cdot \mu \rho \vec{\nabla} \vec{V}$$

pressure and mass density include impurity contribution

Separate Evolution of Three Densities Allows Impurity Mixing

Electron Continuity

$$\frac{dn_e}{dt} + n_e \vec{\nabla} \cdot \vec{V} = \nabla \cdot D \nabla n_e + S_{\text{ion/rec}}$$

Addition of source term due to ionization/recombination

Deuterium Ion Continuity

$$\frac{dn_i}{dt} + n_i \vec{\nabla} \cdot \vec{V} = \nabla \cdot D \nabla n_i + S_{\text{ion/3-body}}$$

Includes term for ionization and 3-body recombination (becomes significant at $T \sim 1\text{eV}$)

Impurity Ion Continuity

$$\frac{dn_z}{dt} + n_z \vec{\nabla} \cdot \vec{V} = \nabla \cdot D \nabla n_z [+ S_{\text{ion/rec}}]$$

Source term is not part of the NIMROD advance— individual charge state populations are updated within atomic physics subroutines

Quasi-Neutrality

$$n_e = n_i + \langle Z \rangle n_z$$

After advancing 3 densities, specifies required $\langle Z \rangle$ for charge state distribution

Approximate Model for Neutral Gas Injection Neglects Jet Asymmetry for Simplicity

- Model assumes gas injection is poloidally and toroidally symmetric (although 3D capability exists)
- Assumed initial radial injection depth is 1 cm (limited by grid resolution); as edge temperature falls below species first ionization energy, neutral deposition extends in to that region
- Total impurity injection rate (vs. time) from gas dynamic code is divided by volume of the injection region to get neutral density deposition rate

Simulation Time Scales Are Artificially Reduced for Computational Expediency


- Resistivity is enhanced by a large factor, E (100-900)
- **Assumption:** During the *thermal quench* phase of the mitigated disruptions, the important processes are **heat loss** by radiation and transport and **reconnection**
- Reconnection scales roughly as $\eta^{1/2}$ ($\sim E^{1/2}$)
- Therefore: Other rates including **atomic physics rates, transport coefficients, gas injection rates**, are increased by $E^{1/2}$
- Resistivity in Ohmic heating term is only enhanced by $E^{1/2}$ to achieve correct balance between radiation, Ohmic heating. Some magnetic energy vanishes.
- When compared with the experiment, **time base is multiplied by $E^{1/2}$, radiated power is reduced by $E^{1/2}$**

Simulated Lundquist Numbers Are Several Orders of Magnitude From ITER

	Lundquist number ($S \sim R B T_e^{3/2} n_e^{-1/2}$)
ITER	$\sim 10^{10}$ ($R=6.2$ m, $B=5.3$ T, $T_e=15$ keV, $n_e=10^{20}$)
DIII-D	$\sim 10^8$ ($R=1.7$ m, $B=2.1$ T, $T_e=3.5$ keV, $n_e=9 \times 10^{19}$)
Alcator C-Mod	$\sim 10^7$ ($R=0.6$ m, $B=5.2$ T, $T_e=2$ keV, $n_e=2 \times 10^{20}$)
NIMROD	$5 \times 10^4 - 2 \times 10^5$ Each simulation takes ~ 4 days on 96 procs on Bassi (NERSC)


$$S \sim 1/E$$

C-mod Neon Jet Simulation Shows Experimental Sequence of Events

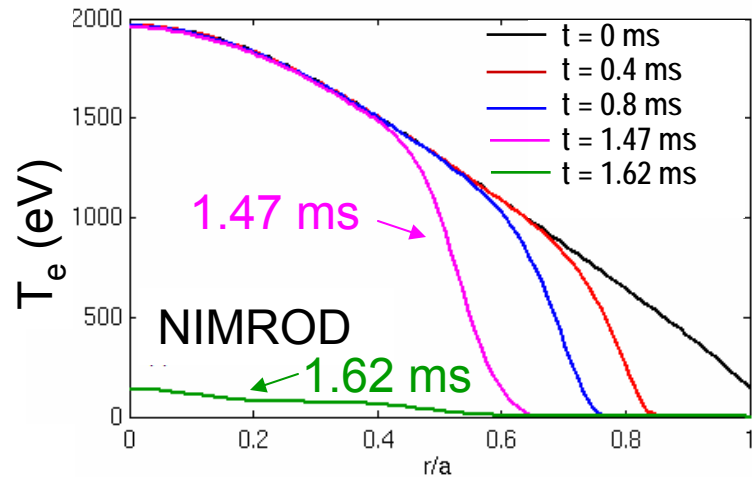

NIMROD results:

- Inward propagating cold front to $r/a \sim 0.6$ followed by sudden core T_e collapse
- Core thermal quench happens in ~ 0.15 ms


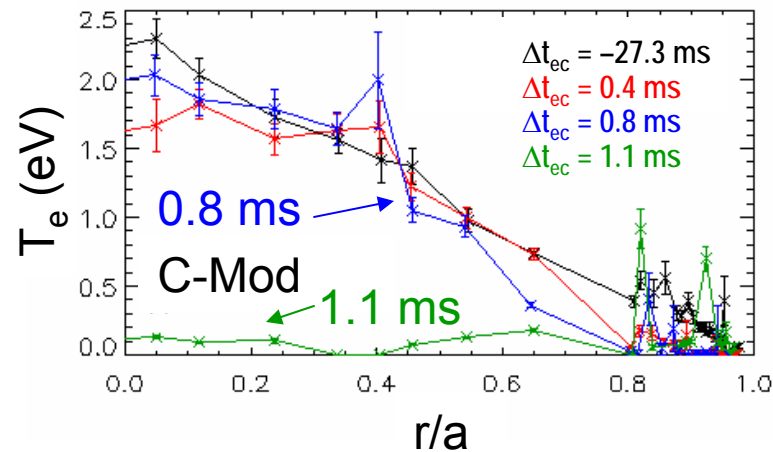


Experimental results:

- Penetration of cold front before thermal quench is slightly shallower
- C-Mod core thermal collapse ~ 0.2 ms

Simulation with $E=400$
($S_{C-Mod} = 2 \times 10^7$, $S_{sim} = 5 \times 10^4$)

Large Pulse of Radiated Power Corresponds to Thermal Quench Onset

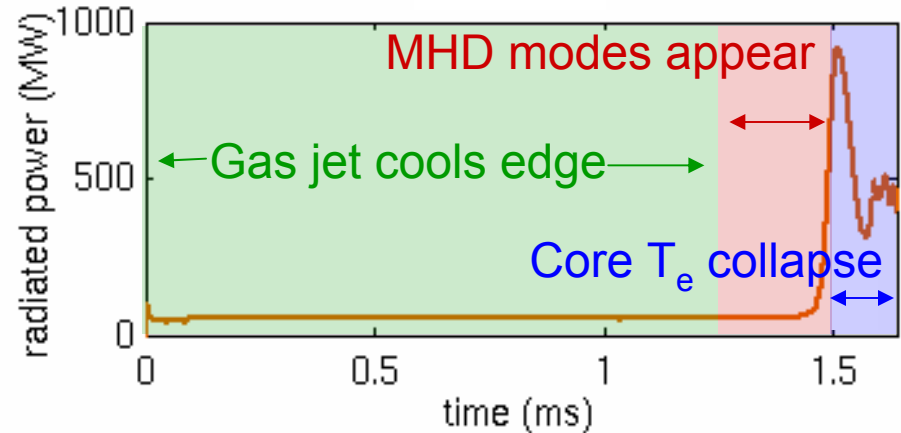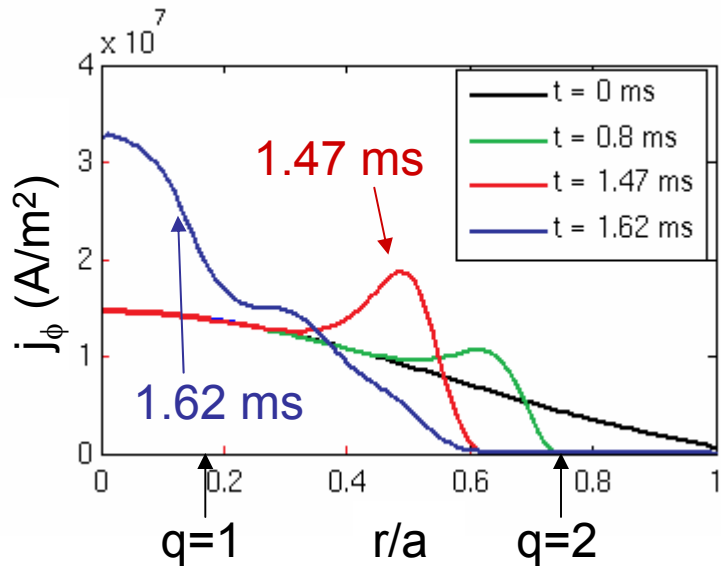


- Current profile contracts as plasma edge cools
- Following thermal quench, peak current density is twice initial value

- Radiated power remains low as cold front propagates in plasma edge
- ~GW radiated power when core temperature suddenly collapses

Thermal Quench at 1.5 ms Corresponds to Destruction of Flux Surfaces


Parallel thermal transport from core to radiating edge drops core temperature rapidly

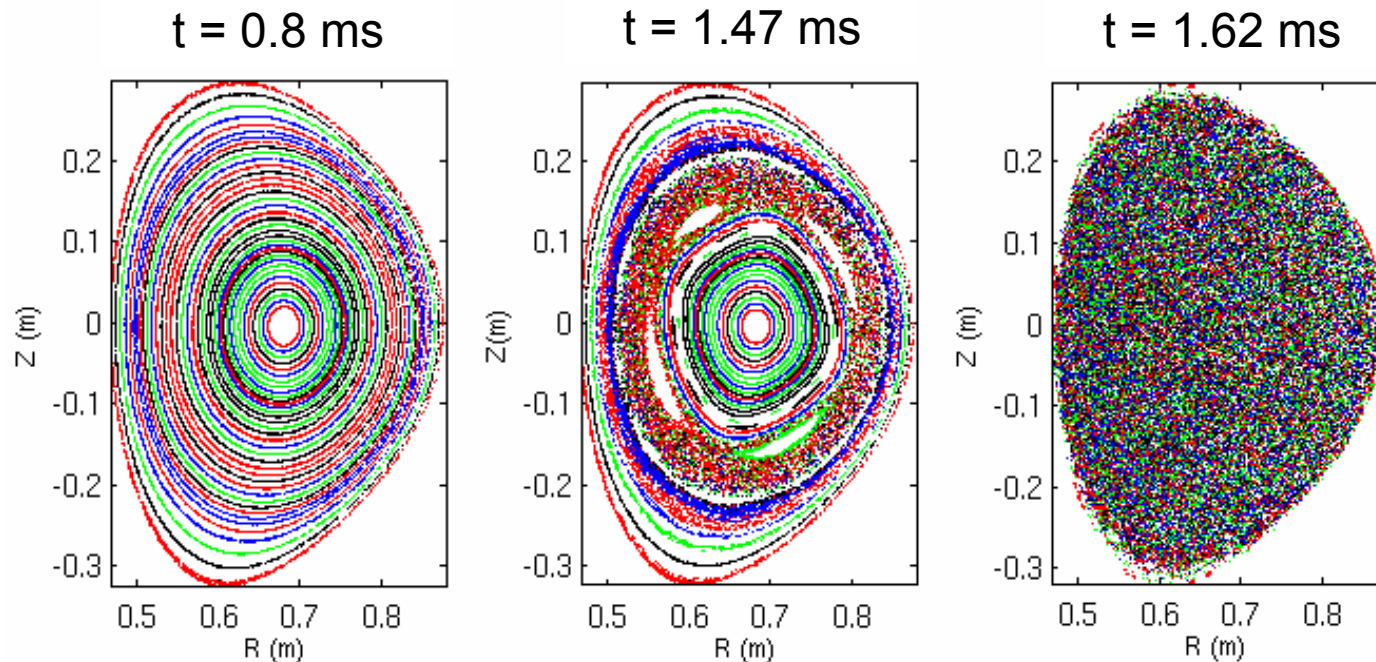

Flux surfaces are completely destroyed in this case; other simulations have shown good flux surfaces remaining inside $q=1$

Scaling of fluctuations with S will be important

Simulation's Large Edge Density is Not Measured by C-Mod Thomson Scattering

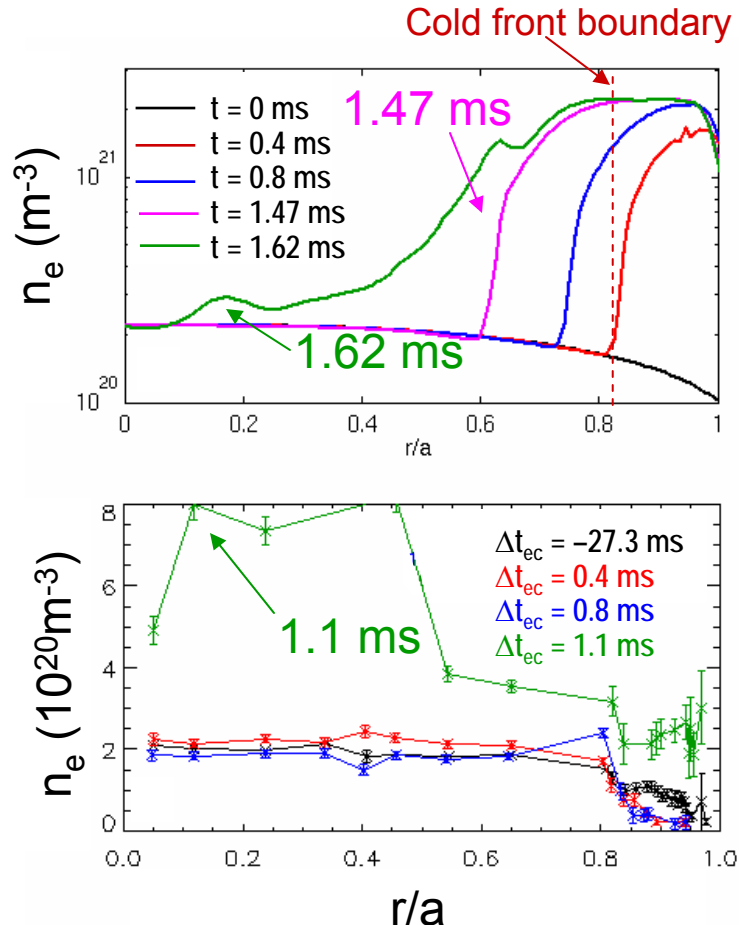

NIMROD results:

- Large increase in edge density before thermal quench, no significant impurity mixing
- Small increase in core density after thermal quench


Experimental results:

- No edge density increase before quench
- Moderate core density increase after quench

⇒ Difference could be ionization fraction, confinement, gas injection rate or distribution

Runaway Electron Avalanching Criterion Is Satisfied in Large Regions of the Plasma

→ Ratio of electron density (free + bound) to critical density needed to stop runaway avalanching (color scale is cut off at 1.0; $n/n_{\text{crit}} < 1 \Rightarrow$ avalanching)

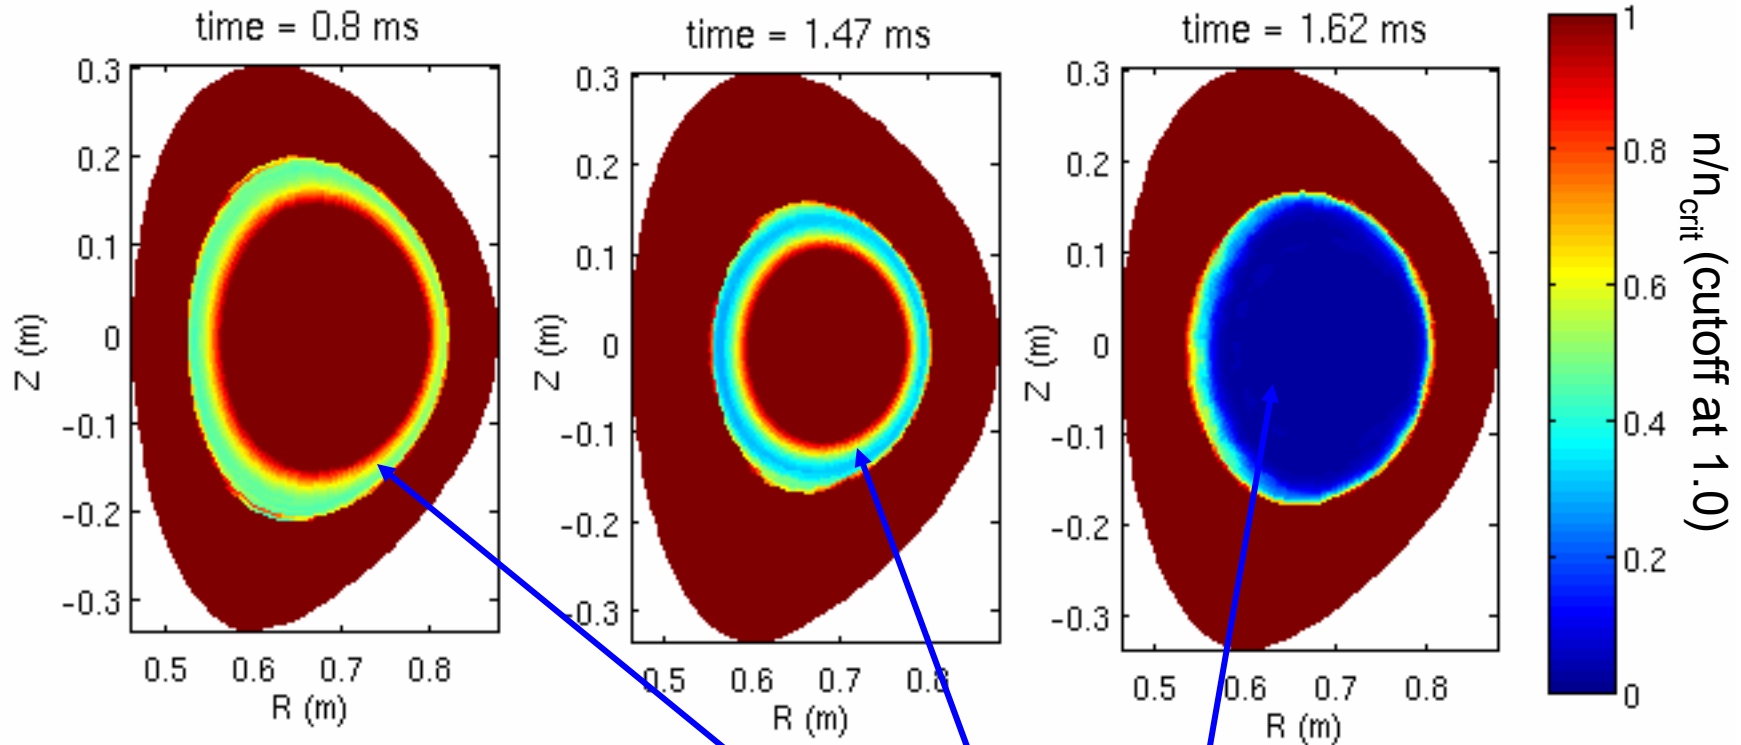


$$n/n_{\text{crit}} \approx 0.12 / E(\text{V/m})^*$$


Regions of runaway electron avalanching

→ New runaway electron diagnostic on DIII-D will allow comparison



Thermal Quench Onset Time Agrees With Data for C-mod Neon Simulations

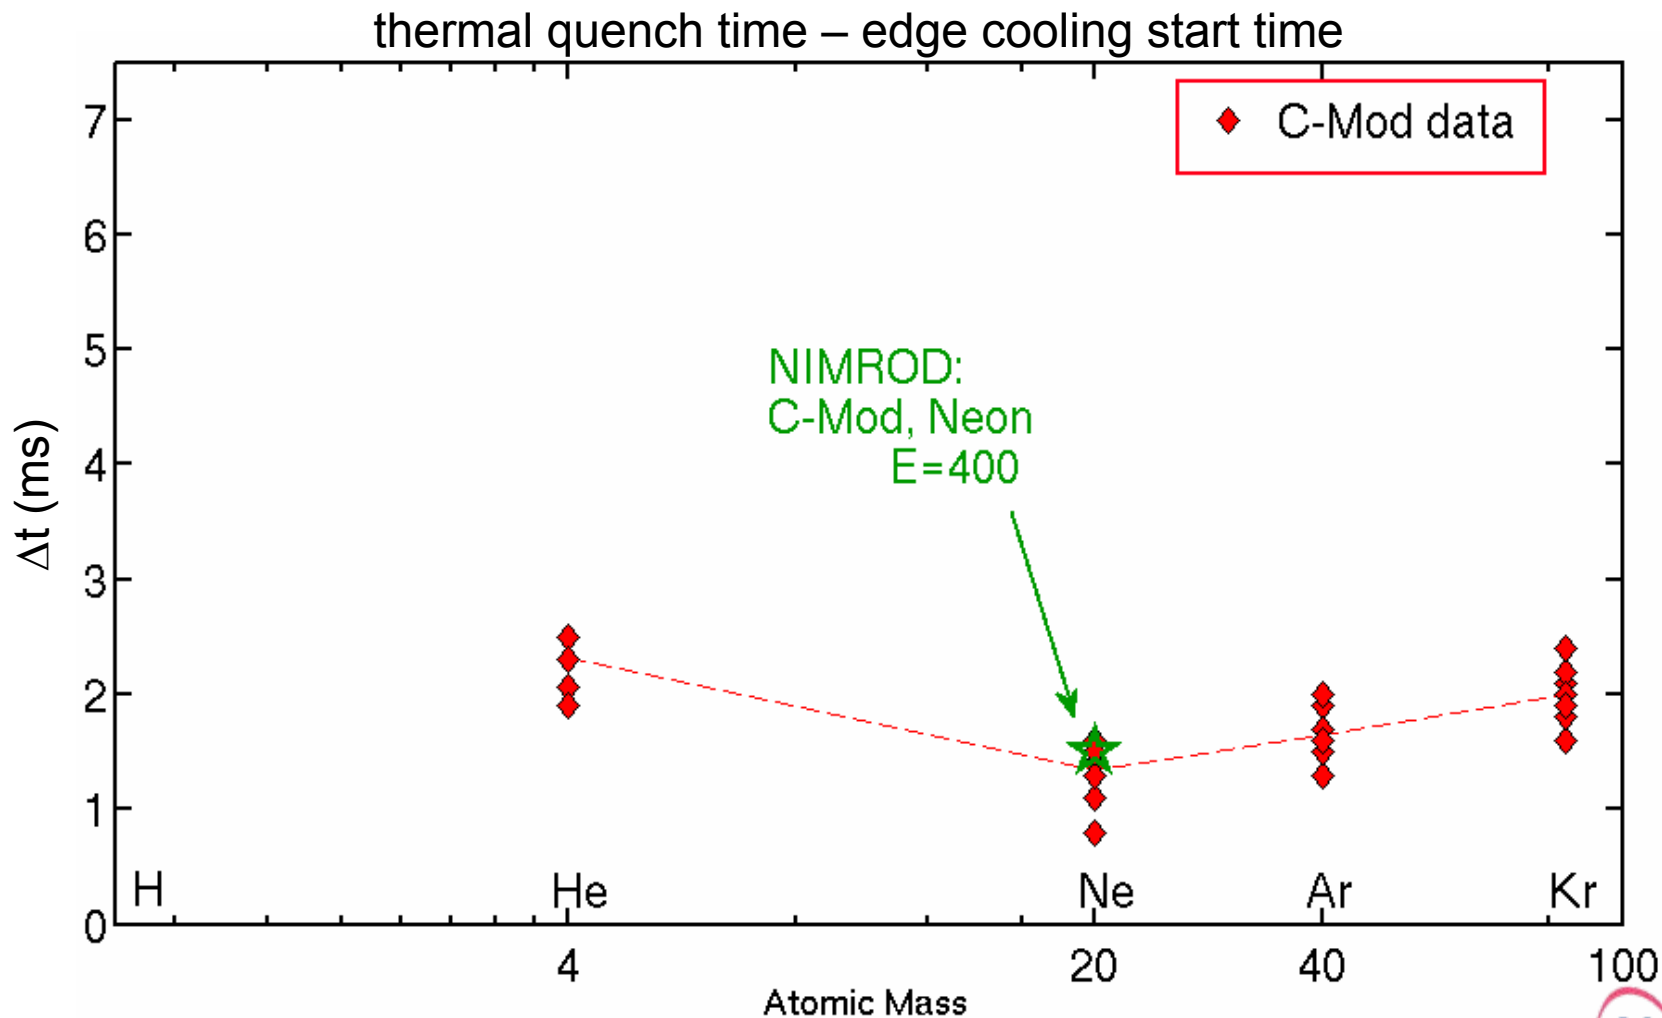

Thermal Quench Onset Time Agrees With Data for C-mod Neon Simulations

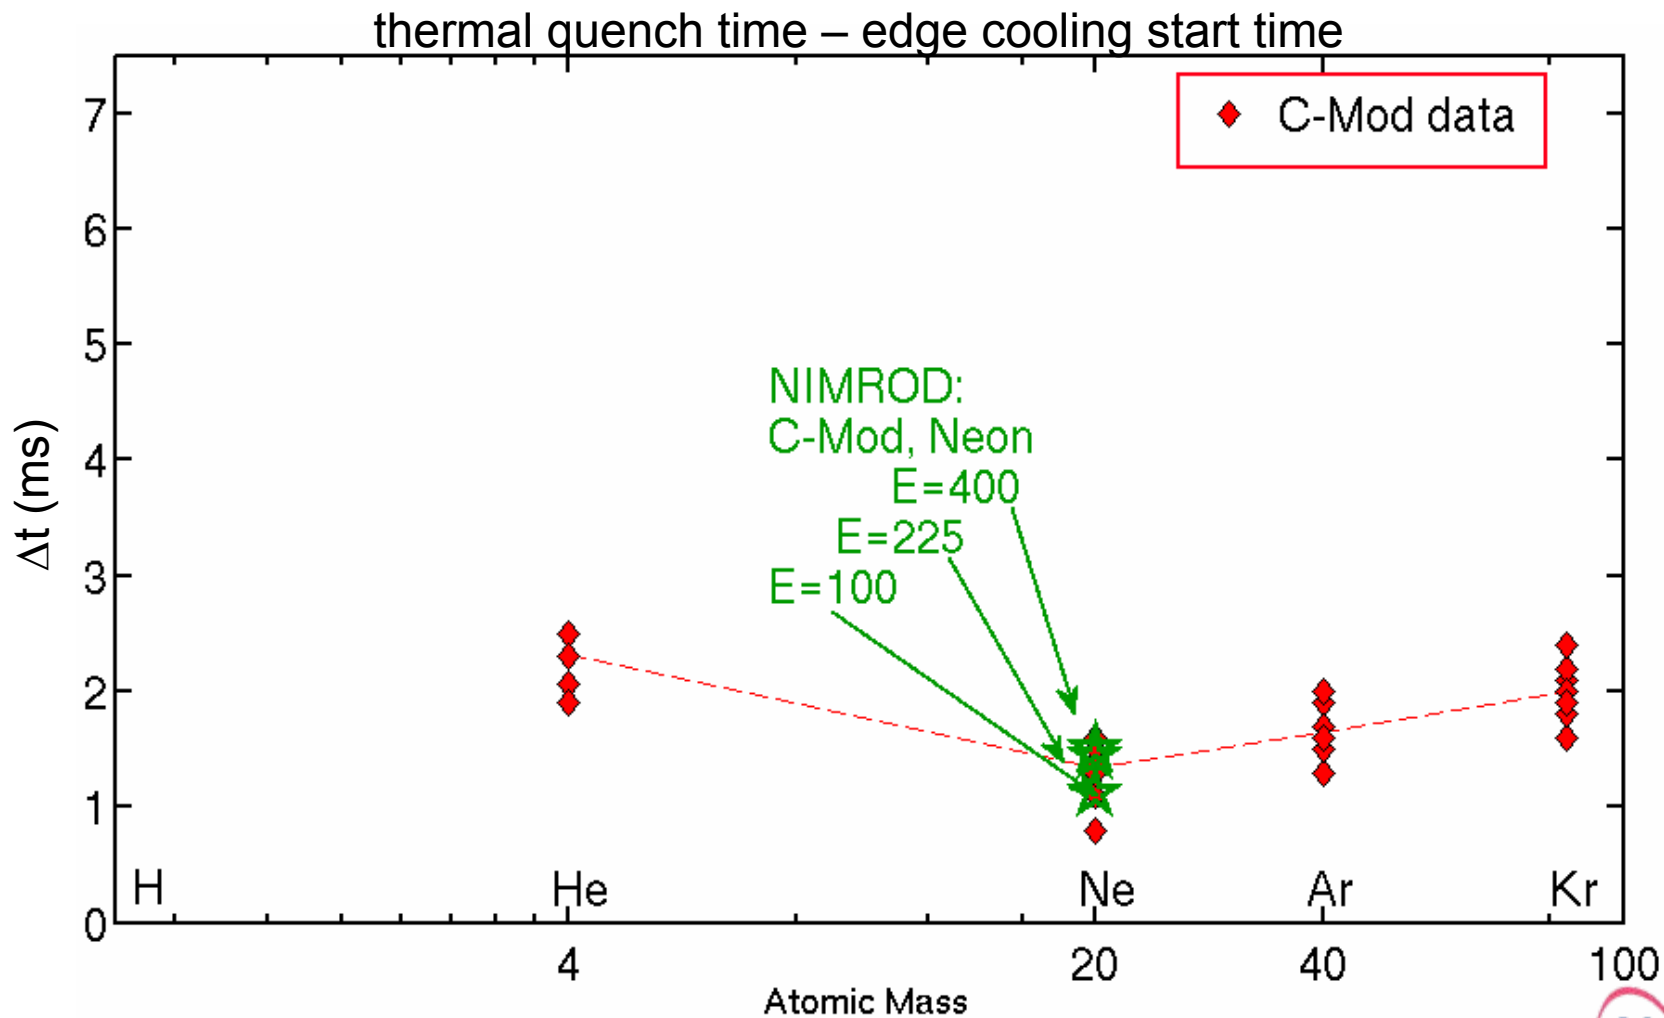


More Cases Required for Convergence of Onset Time With Rescaling Factor

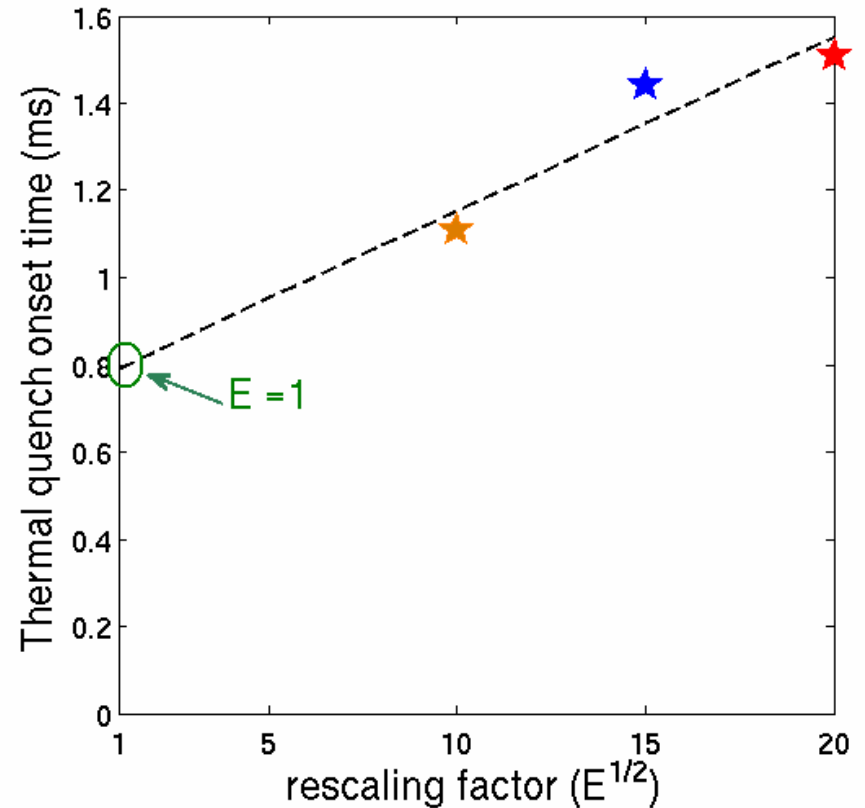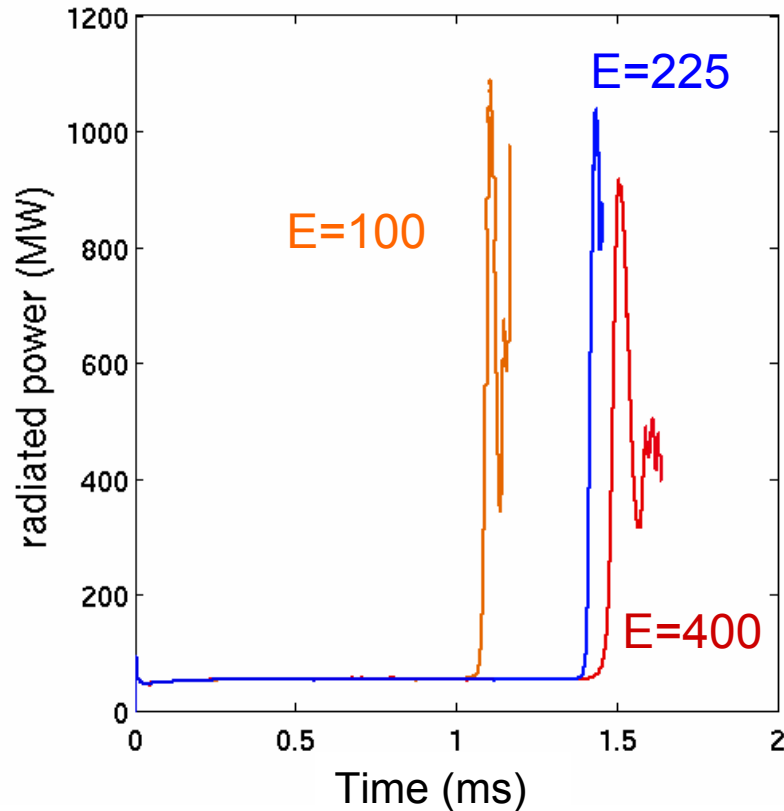


$$S \sim 1/E$$

Pure Helium Jet Simulation Produces Very Long Thermal Quench Onset Time

- Onset time >7 ms, compare with experimental time of 2-2.5 ms
- Simulation does not include intrinsic (or sputtered) boron radiation
- Thermal quench also differs qualitatively




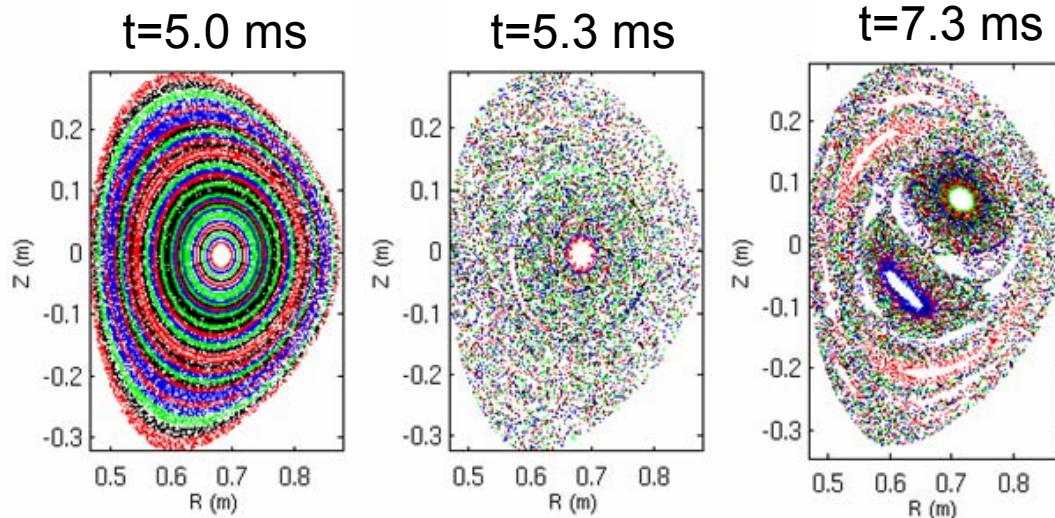


Simulation with $E=400$
($S_{C-Mod}=2 \times 10^7$, $S_{sim}=5 \times 10^4$)

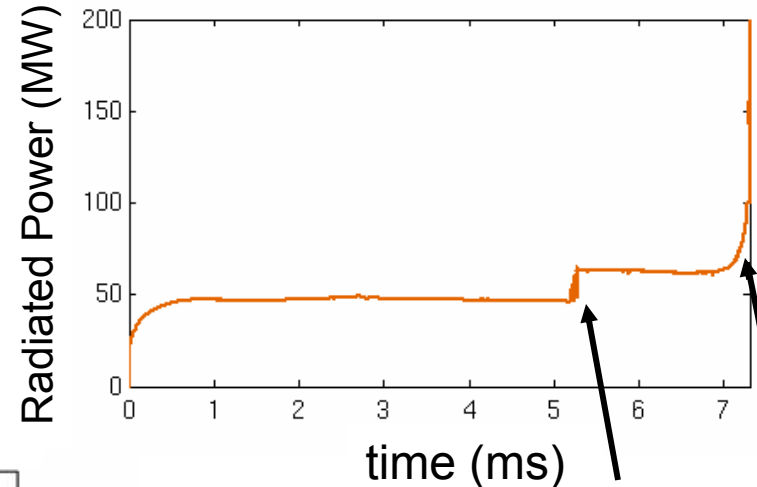



- At 5.3 ms, stochastization of flux surfaces results in merely incremental increase in total radiated power
- Larger radiated power spike associated with 1/1 convection of heat from core to edge

Slow Cold Front Penetration Without Background Impurity Radiation

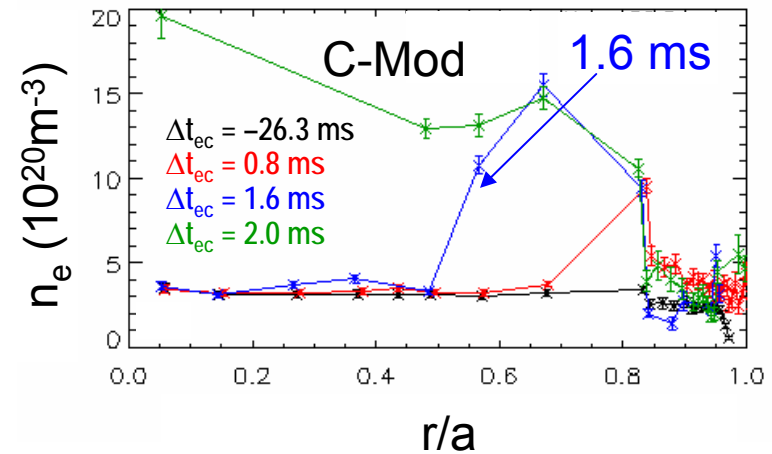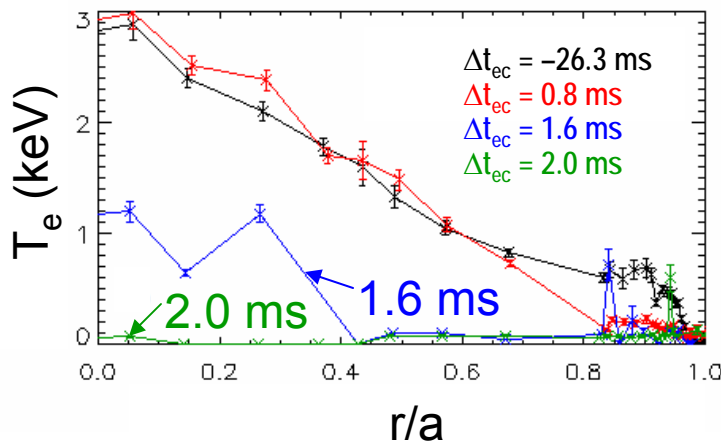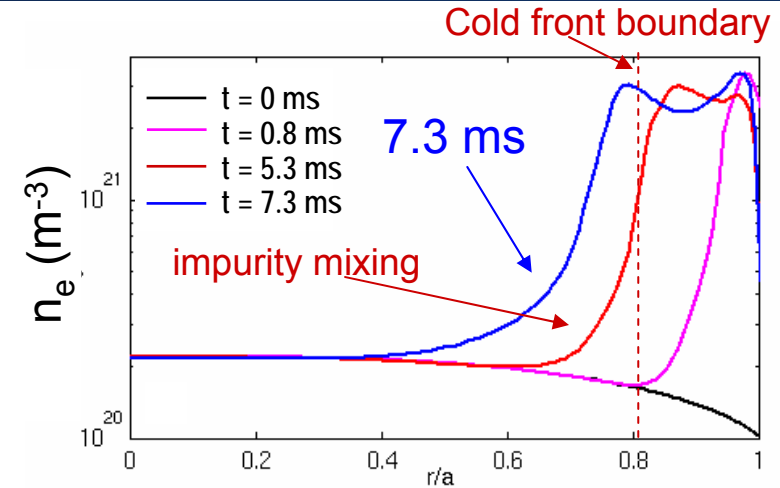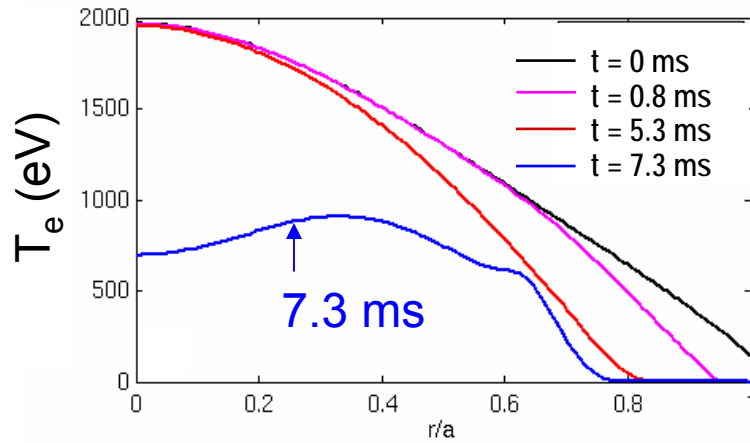


Background Impurity Radiation Can Be Significant for Helium Jet Experiments

- Identical helium simulation but with assumed constant boron density of $4 \times 10^{18}/\text{m}^3$
- Coronal boron cooling rates are assumed
- Thermal quench start time is shortened to 3.4 ms

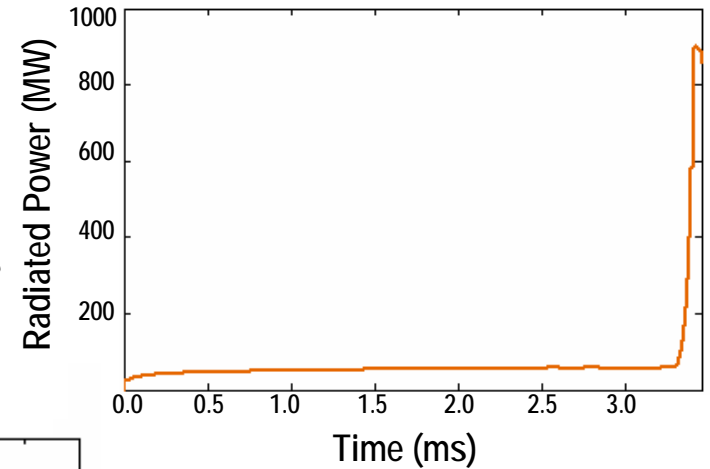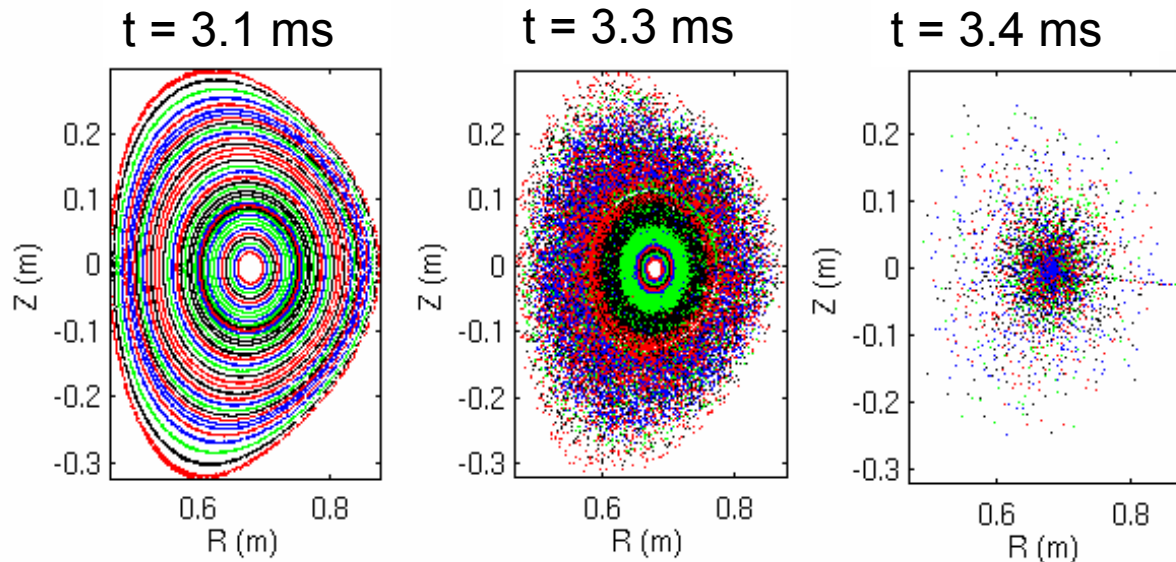


- Unlike pure helium, stochastization of flux surfaces occurs sooner, produces very large radiated power spike


Helium Simulations Will Require Accurate Boron Profile for Quantitative Comparison

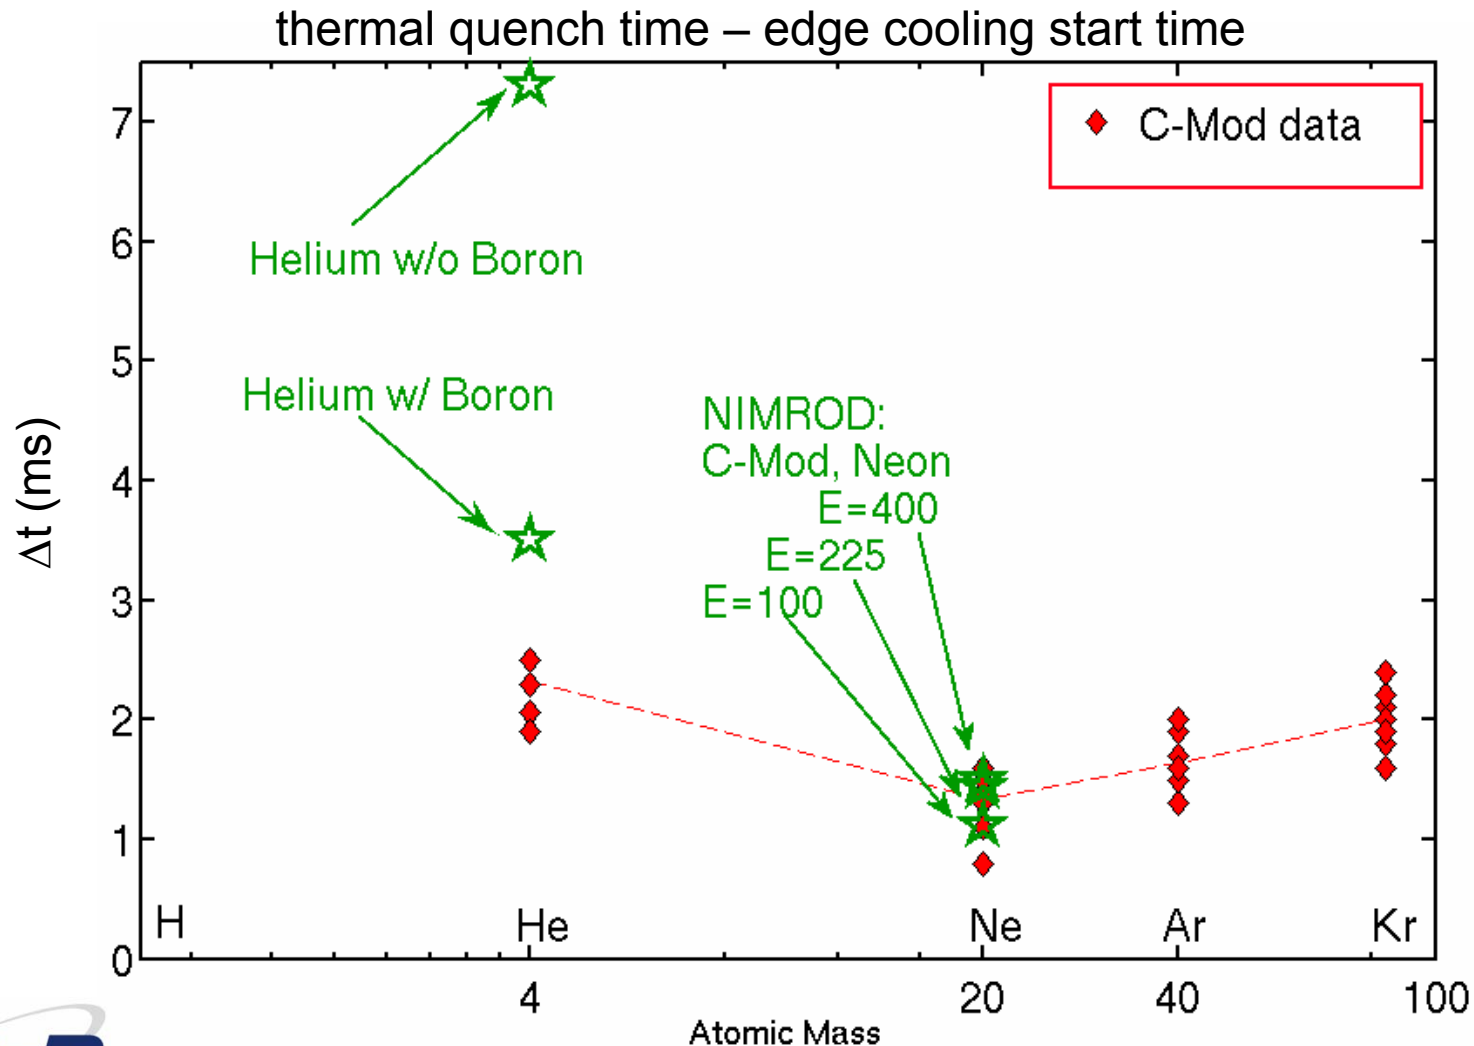

Helium Simulations Will Require Accurate Boron Profile for Quantitative Comparison

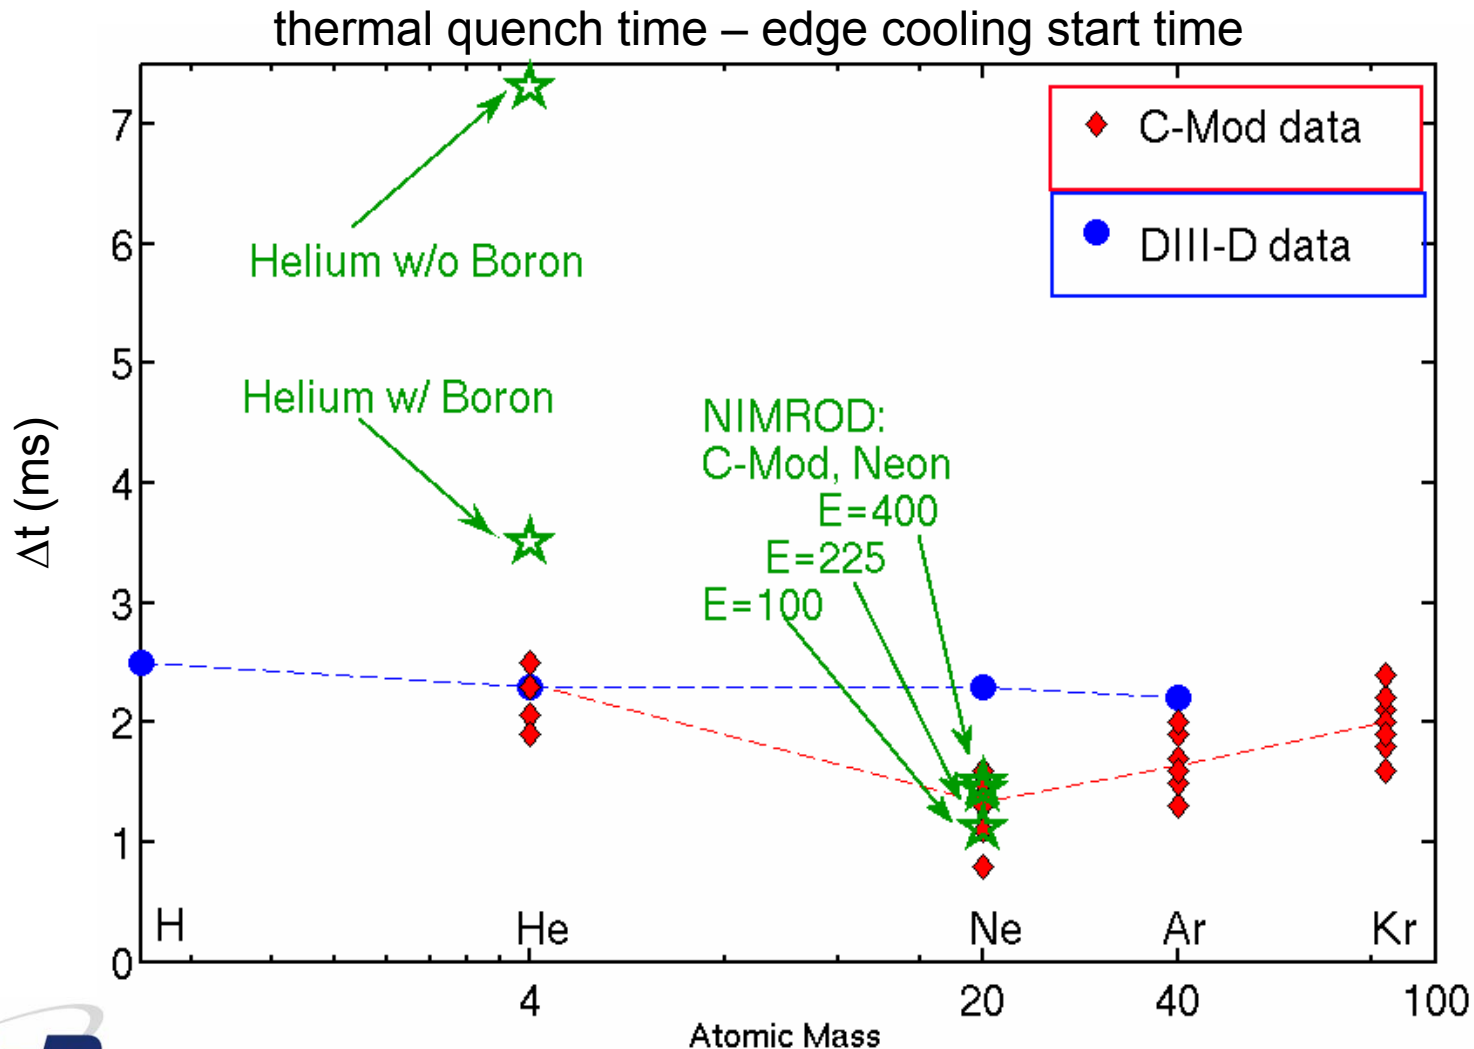

DIII-D Fast Radiated Power Measurement Allows Direct Comparison With NIMROD

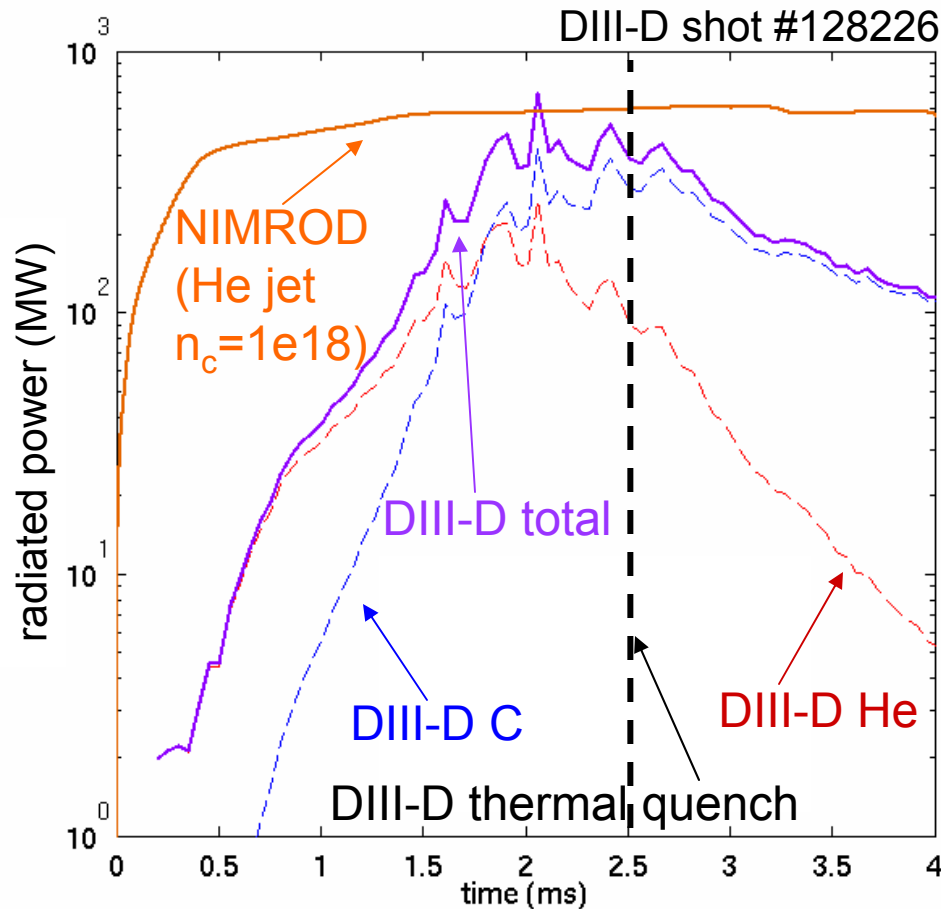

- DIII-D helium jet radiated power measurements show slow rise, not constant low level then large spike
- Helium radiation dominates early on, carbon radiation dominates later in time
- NIMROD simulation has fast rise time for total P_{rad} – may be due to toroidally, poloidally uniform gas injection
- Peak amplitude is comparable

Conclusion

- Atomic physics package has been incorporated into NIMROD to simulate disruption mitigation techniques
- Simulations reproduce the qualitative behavior of MGI experiments: jet cools edge, destabilizes MHD modes, rapid core thermal quench
- Simulated and experimental density profile results must be reconciled
- Thermal quench onset time at $E = 100\text{-}400$ approximately matches C-Mod experimental time for neon gas jet
- Simulations with helium gas jets will require accurate background impurity profiles for better comparison with experiment

ITER Predictability is the Ultimate Goal

- **Improvements to the Model**
 - better understanding of neutral fueling, localization of gas jet
 - Free boundary simulations (allows transport across separatrix)
 - More accurate background impurity profiles/modeling
 - Higher S, further exploration/validation of rescaling
- **Further benchmarking against DIII-D, including high Z gases**
- **Runaway electron analysis including seed terms, avalanching and confinement**
- **Other mitigation techniques: designer pellets, liquid jets, etc.**
- **ITER simulations of promising or well benchmarked techniques**