

**GA-A23223**

**NEUTRON WALL LOADING OF  
TOKAMAK REACTORS**

by  
**C.P.C. WONG**

**OCTOBER 1999**

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

GA-A23223

# NEUTRON WALL LOADING OF TOKAMAK REACTORS

by  
C.P.C. WONG

This is a preprint of a paper to be presented at the 9th International Conference on Fusion Reactor Materials, October 10–15, 1999, in Roma, Italy, and to be published in *Journal of Nuclear Materials*.

Work supported by  
General Atomics IR&D Funds

GA PROJECT 4437  
OCTOBER 1999

## ABSTRACT

Neutron wall loading ( $\Gamma_n$ ) is a key parameter for the selection of fusion power core component materials. It also defines the economic, performance, design, safety and environmental impact of the fusion power plant. This paper reports the determination of the range of  $\Gamma_n$  for economically competitive fusion power plants based on the analysis that couples the MHD stability physics results to a system design code. Cost of electricity (COE) was selected as the parameter to be minimized. Assuming a fusion power core material neutron fluence limit of  $15 \text{ MW}\cdot\text{a}/\text{m}^2$ , the COE for normal and superconducting toroidal field coil tokamaks as a function of aspect ratio (A), fusion power output and thermal efficiency was calculated. The corresponding  $\Gamma_n$  was determined. Results show that for the Tokamak confinement concept and with optimum physics design, higher  $\Gamma_n$  designs will lead to lower COE, but the maximum  $\Gamma_n$  is limited by the power output that would be acceptable to future utilities. For both normal conducting and superconducting coil options, at thermal efficiency of 46% and at the power output range of 1 to 2 GW(e) the average neutron wall loading is 4 to 7 MW/m<sup>2</sup>. For a given power output, higher thermal efficiency will allow lower  $\Gamma_n$ . At the above range of  $\Gamma_n$ , in order to have economical fusion power reactors, for the solid first wall design option, high thermal efficiency of 46% to 57.5% requires the use of alloys like V and W-alloy, respectively. The corresponding COE can be projected to be in the economically competitive range of 62 to 54.6 mill/kWh.

## 1. INTRODUCTION

The goal for fusion research has been the production of economically and environmentally acceptable nuclear power. To minimize the capital cost of the fusion power core, high power density that translates to high neutron wall loading has been proposed [1]. This paper reports the assessment on the range of neutron wall loading that would be optimum for an economical tokamak power reactor. To provide an integrated picture, this assessment includes the physics performance as a function of  $A$  for normal conducting and superconducting magnet designs, and the effects from power output and thermal efficiency. The selection of structural material and blanket design will also directly impact the resulting thermal efficiency of the fusion power core system. This paper has the following outline: Section 2 presents the tokamak equilibrium physics results, Section 3 summarizes the GA-system code, Section 4 presents the engineering assumptions, Sections 5 presents the results for normal and superconducting magnet designs, Section 6 presents the helium-cooled W-alloy, Li-breeder first wall blanket design as an example and Section 7 presents the conclusions of this assessment.

## 2. TOKAMAK EQUILIBRIUM PHYSICS

For a magnetically confined tokamak system, equilibrium physics understanding is quite mature and the optimum physics performance has been projected. At the same time, based on the series of conceptual reactor point designs, the geometric constraints and technology limitations for the tokamak system are also well understood. Ehst [2] has studied the influence of physics parameters on tokamak reactor design and Stambaugh [3] presented the spherical tokamak path to fusion power. Both studies have used simple expressions to project the normalized beta ( $\beta_N$ ), as a function of A.  $\beta_N$  is a key plasma parameter that can be used to estimate beta-toroidal ( $\beta_T$ ) which shows the effectiveness in the use of confinement magnetic field and beta-poloidal ( $\beta_p$ ) which is an indication on the need of additional current drive power to maintain the plasma current for steady state operation. On equilibrium physics, Miller [4] has found operation points that are stable (ballooning and low-n kink mode) at high bootstrap fraction of 99% with A varying from 1.2 to 3. We fitted the key plasma parameters of  $\beta_N$ ,  $\beta_p$ ,  $\beta_T$ , and plasma elongation ( $\kappa$ ), with the inclusion of plasma temperature and density profiles as a function of A from 1.2 to 6 [5]. When compared to the Superconducting Coil (SC) ARIES-RS [6] (A=4) and the normal conducting coil (NC) ARIES-ST [7] (A=1.6) physics projections, our results are more conservative. For the following calculations, in addition to the projected physics performance we also assumed a bootstrap fraction of 90%. The additional power needed for current drive is used to approximate the corresponding power needed for density and temperature profile control in order to maintain optimum physics performance.

### 3. GA-SYSTEM CODE

For an integrated performance assessment of tokamak reactors, we put together an iterative system design code. We started with the specification of physics parameters as a function of  $A$ . With the selection of  $A$ , central column conductor radius ( $R_C$ ), major radius ( $R_O$ ), and inboard coil stand-off distance ( $\Delta_{IB} = \text{shield} + \text{blanket} + \text{first wall}$ ), the geometry of the reactor plasma toroidal chamber can be specified. With the assumption of the plasma triangularity at 0.5 and a scrape-off distance of 0.5 cm at mid-plane, the geometry of the plasma can also be specified. With the selection of the central toroidal magnetic field column current density and conductor radius, and with the process presented in Ref. [3], the toroidal magnetic field strength, plasma ion density and reactor reactivity can be calculated. We have included the option of adding impurities into the core to enhance the radiation of transport power in order to reduce the maximum heat flux at the divertor. Energy balance can then be performed to account for the first wall and divertor heat flux,  $\Gamma_n$ , and re-circulating power of the reactor design. The net output power or the  $\Gamma_n$  can be determined by design iteration. Key design constraints like the stress limit of the selected central column structural material and the water coolant velocity limit of the Cu-coil design are used for the assessment. The key difference between the SC and NC design is the standoff distance of the inboard design. Similar to the ARIES designs [6,7], we selected a standoff distance of 1.3 m for the SC design for superconducting magnet protection, and 0.25 m for the NC design. The latter choice is to minimize the amount of induced radioactivity in order to maintain the Cu-alloy as class-C waste at the end of inboard blanket and central column lifetime of 4 years. Once the reactor geometry and power balance are defined, the costing of the reactor system can be estimated by using the accounting method similar to the ARIES-RS design [6]. The average  $\Gamma_n$  can be calculated by knowing the neutron power and the surface area of the first wall. The maximum  $\Gamma_n$  outer midplane can be determined by assuming a peaking factor of 1.4, since the fusion power core component life will be a function of maximum  $\Gamma_n$ , and

frequent change out will have a negative impact on reactor availability. To account for this effect a simplified availability model is included. This model is based on the assumption that we can achieve an availability of 75% when the maximum  $\Gamma_n$  is at 4 MW/m<sup>2</sup>. We also assumed that the material fluence limit is 15 MW·a/m<sup>2</sup>. The variation of availability as a function of maximum neutron wall loading ( $\Gamma_n$ -max) can be represented by, Availability = 288/(360+6\* $\Gamma_n$ -max). A more complete list of the key physics and engineering design-input parameters is presented in Section 4.



#### 4. PHYSICS AND ENGINEERING DESIGN PARAMETERS

Reactor performance and COE are very sensitive to the design input parameters. Key engineering design input parameters for the assessment of SC and NC designs are given in Table 1. Physics parameters for 2 GW(e) SC and NC designs are given in Table 2.

For both NC and SC designs, similar to the ARIES-RS [6] and ARIES-ST [7] designs, the outboard coil thickness is assumed to be 0.5 m. The volume of the toroidal and poloidal coil set as dictated by the selected geometry is then used for the costing estimate for both designs.

**Table 1**  
**Key physics and engineering design input parameters**

	SC	NC
Inboard stand-off distance, m	1.3	0.25
Outboard coil thickness, m	0.5	0.5
Central column bore radius, m	1.775	0.0
Divertor vertical height, m	0.5	0.5
Bootstrap fraction, %	90	90
Max. ion temperature, keV	18	16
Helium concentration	0.1	0.1
Double null divertor	Yes	Yes
Water coolant speed limit, m/s	NA	10
$\Gamma_n$ and first wall heat flux peaking factor	1.4	1.4
Material fluence life-time, MW.a/m <sup>2</sup>	15	15
Thermal efficiency, %	46	46
Current drive	Fast wave	Fast wave
Assumed availability at $\Gamma_{n-max}=4$ MW/m <sup>2</sup>	0.75	0.75
Costing assumptions	ARIES-RS <sup>(6)</sup>	ARIES-RS <sup>(6)</sup>

**Table 2**  
**Physics and engineering parameters of 2 GW(e) SC and NC reactor designs**

	SC	NC
Plasma aspect ratio, A	4	1.6
Plasma vertical elongation, $\kappa$	1.769	2.799
Minor plasma radius, a (m)	1.469	2.197
Major toroidal radius, $R_O$ (m)	5.876	3.515
Plasma volume ( $m^3$ )	416.5	842
First-wall surface area ( $m^2$ )	501.9	609
Radial profile exponent for density, $s_n$	0.634	0.275
Radial profile exponent for temperature, $s_T$	0.702	0.154
Toroidal beta (%) volume averaged	2.8	37.5
Poloidal beta (%) volume averaged	2.29	1.51
On-axis toroidal field (T)	10.2	2.6
Plasma current (MA)	11.9	29.9
Plasma ion temperature (keV) peak	18	16.0
Peak plasma electron density, $n_e$ ( $10^{20}/m^3$ )	5.04	3.04
Peak plasma ion density ( $10^{20}/m^3$ )	3.86	2.29
Energy confinement time ( $\tau_E$ , s)	0.715	1.14
( $\tau_E$ -ITER98p(y), s)	0.717	0.55
Kr concentration (used to distribute transport power)	0.00092	0.00129
Effective plasma charge ( $Z_{eff}$ )	2.36	2.827
Average fusion power density ( $MW/m^3$ )	10.89	6.12
Fusion power (MW)	4535	5148
Number of TF coils	16	12
Mass of coil set (tonne)	3236	2480
TF central column avg. current density ( $MA/m^2$ )	31	15
TF coil resistive power consumption [MW(e)]	0	311
Recirculating power [MW(e)]	330	610
Thermal conversion efficiency (%)	46	46
CD/heater [FWCD*] power (MW)	106.7	87.8
Plant Q	7.04	4.27
Total useful thermal power (MW)	5047	5670
Gross electrical output power [MW(e)]	2322	2608
Net electrical output power [MW(e)]	1992	1998
Average 14.06 MeV neutron load ( $MW/m^2$ )	6.93	6.62
Blanket energy multiplication	1.1	1.1
Average first wall heat flux ( $MW/m^2$ )	2.009	1.79
Divertor max. heat flux ( $MW/m^2$ )	2.244	3.72

\*Fast Wave Current Drive

## 5. RESULTS

Based on the selected physics and engineering inputs parameters, we used the GA-system code to estimate the COE for both SC and NC designs as a function of  $A$ ,  $\Gamma_n$ , reactor output power and thermal power conversion efficiency. It should be noted that based on the geometric constraints of the tokamak/toroidal configuration, at a constant output power, lower  $A$  would mean larger minor radius and larger first wall surface area which would then lead to lower average  $\Gamma_n$ .

### 5.1. NORMAL CONDUCTING MAGNET DESIGN

For a NC tokamak design, significant power consumption is the resistive power loss of the normal conducting toroidal and poloidal field coils. The resistive power loss is a function of coil current and electrical resistivity variation as a function of neutron radiation damage and coil temperature over the lifetime of the central column. The coolant channel design and power input from resistive power and volumetric power generated from high-energy neutrons determine the coil temperature. Similar to Ref. [2], these coupling effects are accounted for in our calculation. To minimize the recirculating power of the NC coils, a tapering factor of 2.5 is used for the central column design, with the narrowest radius located at the mid-plane. Similar to the ARIES-ST [7] design, the 0.5 m thick outboard TF-coil leg is also used as the vacuum vessel. To minimize the temperature of the central column, the water coolant is operated at low temperatures of  $T_{in} = 30^\circ\text{C}$  and  $T_{out} = 50^\circ\text{C}$ .

Figure 1 shows the COE of NC tokamak reactor designs as a function of  $A$ , reactor output power and average  $\Gamma_n$  at a gross thermal efficiency of 46%. The results show that the COE has a minimum around  $A = 1.5$  to  $1.6$ . The minimum is broader at lower output power of 1 GW(e), and is more pronounced at 4 GW(e). Due to the increase of re-circulating power at higher  $A$ , the COE increases for  $A > 2$ . For  $A < 1.5$ , the physical size of the reactor gets much bigger and the

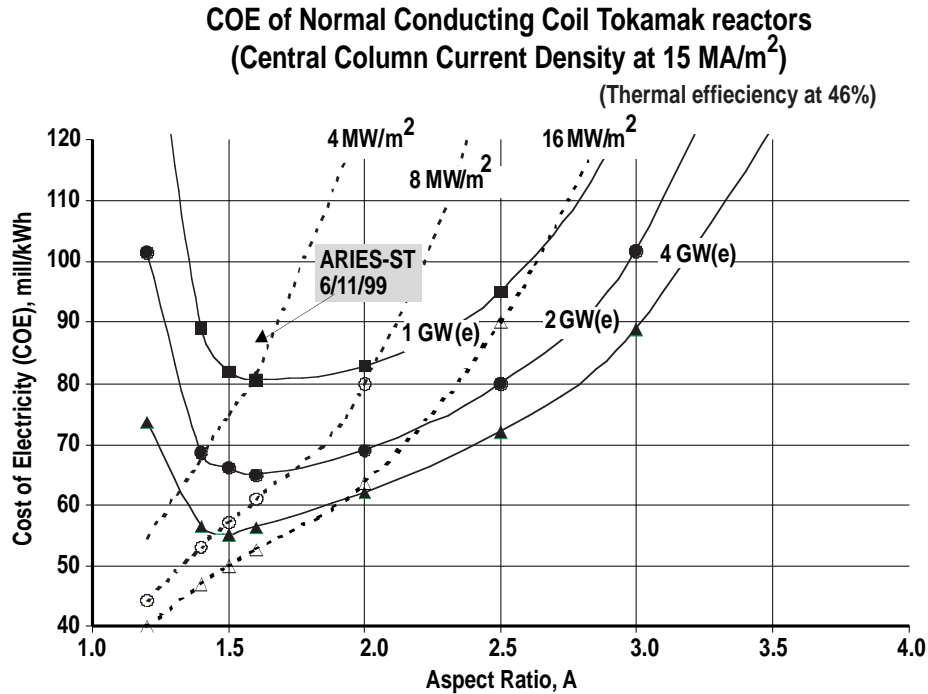


Fig. 1. COE of normal conducting coil tokamak reactor designs.

average  $\Gamma_n$  gets lower for the same output power, therefore the COE increases. Figure 1 shows that at an output power of 1 to 2 GW(e) and  $1.5 < A < 1.6$ , the minimum COE decreases from 82 to 65 mill/kWh with the average  $\Gamma_n$  increases from around 3 to 7 MW/m<sup>2</sup>. Details of the design parameters of a 2 GW(e) NC design is given in Table 1 and Table 2.

## 5.2. SUPERCONDUCTING COIL DESIGN

Relatively, the evaluation of the SC design is much simpler. With the standoff inboard distance of 1.3 m, the required protection of the superconducting coil can be satisfied. Being superconducting, the recirculating power required is assumed to be zero and the power required to maintain the cryogenic system is assumed to be negligible.

Figure 2 shows the COE of SC designs as a function of A, reactor output power and average  $\Gamma_n$  at a gross thermal efficiency of 46%. The results show that at constant A, the COE decreases with higher average  $\Gamma_n$ , with correspondingly higher output power. Take  $A = 4$  as an example, at

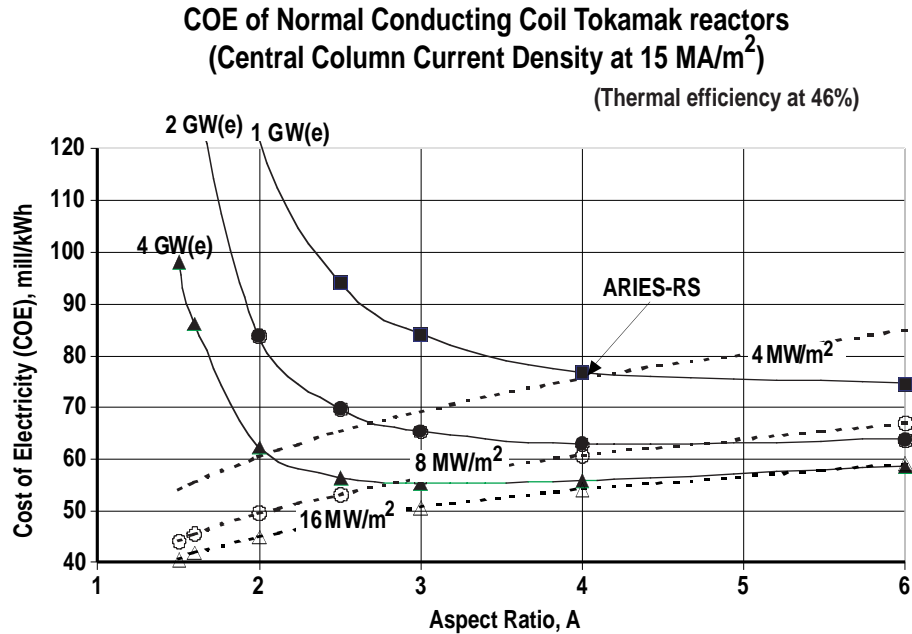


Fig. 2. COE of superconducting coil tokamak reactor designs.

the output power range of 1 to 2 GW(e), the COE decreases from 76 to 63 mill/kWh with the increase of average  $\Gamma_n$  from 4 to 7 MW/m<sup>2</sup>.

At the higher output power of 4 GW(e), the COE minimizes at high average  $\Gamma_n > 8 \text{ MW/m}^2$ , but due to the effect of the loss in availability at higher neutron wall loading, the COE has a flat minimum around  $3 < A < 4$ .

### 5.3. IMPACTS FROM THERMAL EFFICIENCY

Reference 1 presented a V-alloy helium-cooled first wall blanket design with an estimated gross- $\eta_{th}$  thermal efficiency of  $\sim 46\%$  [1]. To increase the gross thermal efficiency, a W-alloy helium-cooled design [8] shows the possibility of having a gross- $\eta_{th}$  of 57.5%. We evaluated the impacts on  $\Gamma_n$  for these efficiencies. The conceptual design of the W-alloy blanket is summarized in the next section. Figure 3 shows the COE, the plasma volume, the Greenwald density ratio and  $\Gamma_n$  variation with power output and gross thermal efficiency. The superconducting coil,  $A=4$  reactor is used as an example. As shown, the COE decreases with higher power output and

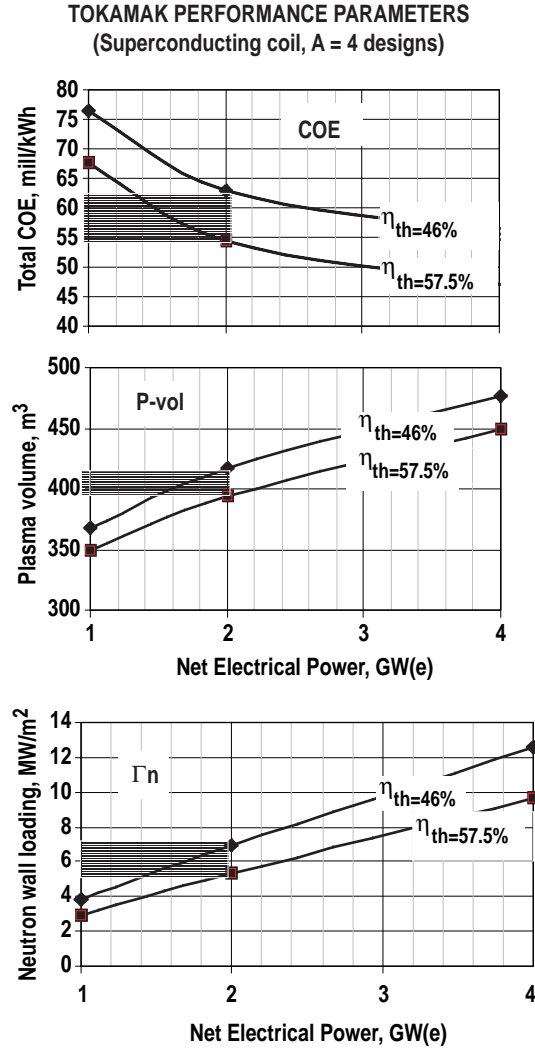


Fig. 3. Tokamak performance parameters.

higher thermal efficiency. At 2 GW(e) and  $\eta_{th}=57.5\%$ , the COE is 54.6 mill/kWh, which would be competitive to advanced fission power plant. The volume of the plasma (P-vol) does not change much. The densities required at the temperature assumed are 1.23–1.3 times the Greenwald limit. The density can be reduced to acceptable value by increasing the plasma temperature to about 25 keV. Correspondingly, with the fixed power output of 2 GW(e), higher thermal efficiency of 57.5% would lead to lower average neutron wall loading of 5.6 MW/m<sup>2</sup>.

## 6. HELIUM-COOLED W-ALLOY, LI-BREEDER FIRST WALL BLANKET DESIGN

As an example, Fig. 4 shows the schematic of the helium-cooled W-alloy first wall blanket design [8]. The selected alloy is W-5Re. To meet the proposed design temperature range of W-5Re,  $800^{\circ} < T < 1400^{\circ}\text{C}$ , the helium coolant was selected to have an inlet temperature of  $800^{\circ}\text{C}$  and an outlet temperature of  $1100^{\circ}\text{C}$ . The first wall is made up of separate units, which in this case are connected to separate cooling manifolds at the back of each module. The first wall units consist of multiple parallel passages connected through an integral manifold to round inlet and outlet connections. The round connections should be easier to fit up and minimize thermal stresses at the interface. Identified critical issues for this design are the acquisition of the fusion neutron irradiated properties of W-alloy, and the development of the fabrication of W-alloy first wall and blanket components.

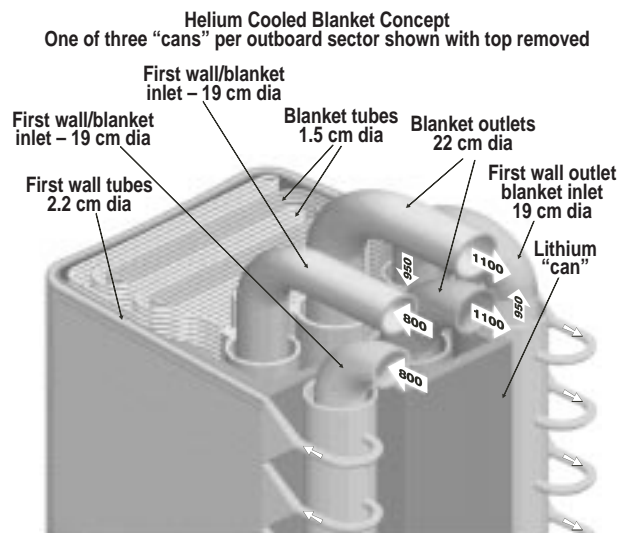


Fig. 4. W-alloy helium-cooled blanket concept.



As shown in Fig. 4, the piping is routed in two circuits. The first circuit includes the first wall and part of the interior blanket tubing. Helium at 800°C enters the first wall through the supply manifold and exits into the first wall outlet manifold at 950°C. The helium is then routed inside the blanket zone, a container filled with lithium, to the first supply manifold for the tubes. The first tube circuit exits into a return manifold at 1100°C. The second helium circuit is also fed at 800°C and exits at 1100°C routing through the blanket zone only. The helium at outlet temperature of 1100°C can be coupled to a closed cycle gas turbine power conversion system and the corresponding projected  $\eta_{th}$  is 57.5%. For a 2 GW(e) reactor, the estimated average and maximum neutron wall loading are 5.6 and 7 MW/m<sup>2</sup>, respectively. The corresponding estimated COE is 54.6 mill/kWh for this 2 GW(e) plant.

## 7. CONCLUSIONS

Neutron wall loading is a key parameter for the selection of fusion power core component materials. It defines the economic, performance, design, safety and environmental impact of the fusion power plant. We determined the range of neutron wall loading for economically competitive fusion power plants based on the analysis that couples the MHD stability physics results to a system design code including the selected power output and the geometric impact of a toroidal reactor. Results show that normal conducting toroidal coil reactor COE optimizes at lower A in the range of 1.4 to 1.6. Superconducting coil reactor COE decreases with the increase of A. At selected net power output, normal and superconducting coil designs will optimize to similar COEs and similar range of neutron wall loading. For the Tokamak confinement concept and with optimum physics design, higher neutron wall loading designs will lead to lower COE, but is limited by the maximum power output to be acceptable to future utilities. For both normal conducting and superconducting coil options, and at the power output range of 1 to 2 GW(e) the range of neutron wall loading is from 3 to 7 MW/m<sup>2</sup>. For the solid first wall design, in order to have economical fusion power reactors, high thermal efficiency of 46% to 57.5% require the use of high temperature alloys like V and W-alloy, respectively. The corresponding COE is projected to be in the economically competitive range of 62 to 54.6 mill/kWh.

## REFERENCES

- [1] C.P.C. Wong *et al.*, “A Helium-Cooled Blanket Design of the Low Aspect Ratio Reactor,” IAEA Technical Committee Meeting on Fusion Power Plant Design, Culham, United Kingdom, 1998, to be published in Fusion Eng. Design.
- [2] D. Ehst and K. Evans, Jr., “The Influence of Physics Parameters on Tokamak Reactor Design,” Nucl. Technol. **43** (1979).
- [3] R.D. Stambaugh *et al.*, “The Spherical Tokamak Path to Fusion Power,” Fusion Technol. **33** (1998) 1.
- [4] R.L. Miller, *et al.*, “Stable Bootstrap-Current Drive Equilibrium for Low Aspect Ratio Tokamaks,” edited by J.W. Conner, E. Sindoni and J. Vaclavik, in Theory of Fusion Plasmas, p. 11 (Editrice Compositori, Bologna, (1997); General Atomics Report GA-A22433 (1996).
- [5] C.P.C. Wong and R. D. Stambaugh, “Tokamak Reactor Designs as a Function of Aspect Ratio,” in the Proc. of the 5th Int. Symp. on Fusion Nucl. Technol., Rome, Italy (1999), to be published.
- [6] M.S. Tillack, “ARIES-RS Tokamak Power Plant Design,” Fusion Engineering and Design **38** (1997) 1.
- [7] R.L. Miller, *et al.*, “Design Point Determination for the Commercial Spherical Tokamak, ARIES-ST,” in the Proc. of the 17th IEEE/NPSS Symp. on Fusion Engineering, San Diego, California, Vol. 2, (1997) 1031.
- [8] C.P.C. Wong *et al.*, “Helium-cooled Refractory Alloys First Wall and Blanket Evaluation,” in the Proc. of the 5th Int. Symp. on Fusion Nucl. Technol., Rome, Italy (1999) to be published.

## **ACKNOWLEDGMENT**

Work supported by General Atomics IR&D funds.